

Compact All Environment Subwoofer



Superb audio quality

Articulate low end response

Fully weatherproof construction

One-piece, 1/2" thick molded cabinet

Molded-in colors will not crack or fade

Comprehensive warranty: 10 year cabinet, 5 year hardware, 2 year electronics

Stainless steel grill and inserts

Molded in threaded inserts allow for flying and bracket mounting

Solar molded

1.5" stand-mount socket on bottom

Three layer WeatherTech™ grill

Self-draining cabinet design

Twelve (12) optional cabinet colors

Easy grip handles and gasketed lid

The Soho is a companion subwoofer for the smaller loudspeakers in the Technomad line. Designed for use in abusive, real-world situations, the Soho is a compact and durable subwoofer which adds additional accurate low frequency output to a Technomad system.

The Soho is designed to operate as the subwoofer in a system of Vernal, Vienna, Paris or Noho loudspeakers. The Soho features an internal passive network and is wired to pair 1+/1- on the Speak-on connectors. This allows a Soho Tour to be daisy-chained on the same amplifier as a full-range Technomad with no additional external processing or dedicated amplifier cabling needed. Technomad loudspeakers are extremely EQ compliant and offer the user unrivaled control over every type of program material. Only the highest-quality metalized polypropylene capacitors and heavy gauge inductors are used in Technomad networks, minimizing insertion loss and resulting in smooth response throughout the operating bandwidth.

The Soho is designed for maximum flexibility and ease of use. A 1.5" diameter stand-mount socket is molded into the bottom of cabinet for tripod mounting. Four 1/4-20 threaded inserts on the top and right sides of the cabinet allow the Soho to be flown easily with eye-bolts.

The Soho can be bracket-mounted with stainless AS Series wall-mount using the four 5/16-18 inserts on the back of the cabinet.

The Soho is solar rotationally molded for maximum sustainability.

The Tour model configuration includes two spring-loaded plastic handles and a gasketed lid for military grade protection when in case mode.

All hardware is black stainless steel to prevent corrosion and is recessed to prevent damage during shipment. From the inside out, every part of every Technomad loudspeaker is designed to provide optimum performance in even the worst conditions.

Due to the Soho's extremely small size, shallow depth and very powerful output, Soho subwoofers can be installed in small areas - within walls, scenery, shrubbery, etc - providing even bass coverage over larger areas. This eliminates the need for huge, expensive subwoofer cabinets that take up large amounts of floor space.

Soho Tour

Audio Specifications

Frequency Response	50 Hz- 200 Hz (+/- 2 dB) 40 Hz - 200 Hz (-10 dB)
Maximum Continuous Power	450 watts
Maximum Peak Power ¹	900 watts
Recommended Amplifier Power	500 watts
Sensitivity *	97.4 dB SPL
Maximum Output (long term) ¹ **	124 dB SPL
Maximum Output (peak)	127 dB SPL
HF Dispersion	-
Nominal Impedance	8 ohms

¹ Based on ALMA EIA test 426B

* RTA total output, axial, 1W@1M

** Based on Maximum Continuous Power rating

Physical Specifications

Height	21.13"	53.7 cm
Width	15.97"	40.6 cm
Depth	10.5"	26.7 cm
Weight	48 lb.	19.5 kg
Shipping Weight	50 lb.	20.4 kg
Fittings	4x 5/16-18 rear 4x 1/4-20 top 4x 1/4-20 side 2x 3/18-18 sides	1x gasketed lid 2x handles



Tripod socket	4 (one per side)
Cabinet Material	MD polyethylene
Grill	16G stainless

Signal Chain


High Frequency	-
Low Frequency	12" cone driver
Connectors	2x Neutrik™ NL4MP Speak-on
Crossover	Passive internal

Available Options

Mounting Options	Wall-mount brackets Yoke-mount brackets Pole-mount Adaptor
70V transformer	400 watt fixed tap
Color (grill and cabinet)	12 optional colors
Custom Termination	

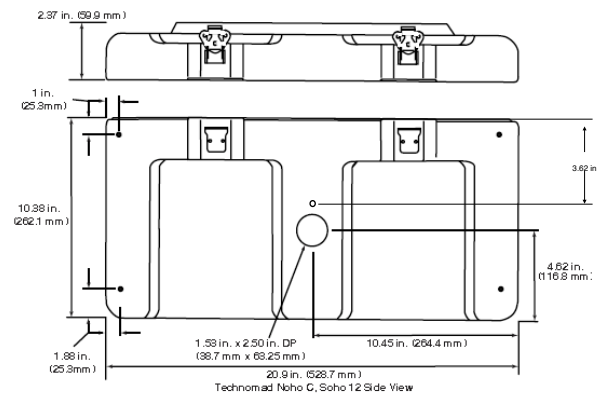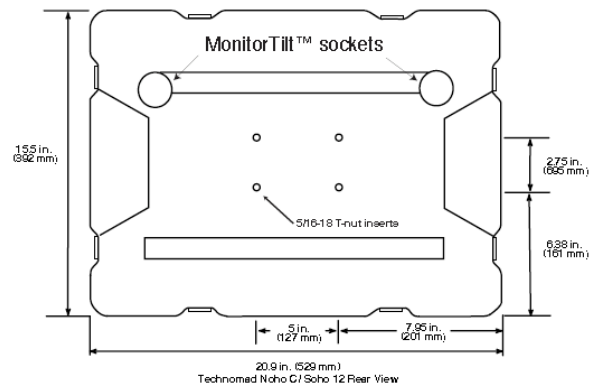

● = 1/4-20 Threaded Insert (Right side only)

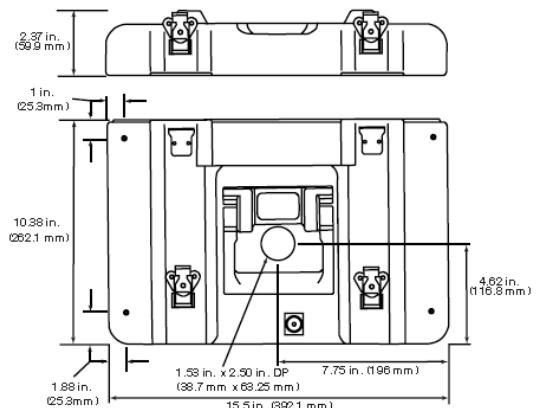

● = 1/4-20 Threaded Insert (Top end only)

Architectural and Engineering Specifications

The loudspeaker system shall be of subwoofer type consisting of one 12" low frequency cone type transducer in a vented direct radiating enclosure. The system shall meet the following performance criteria: Frequency Response: 50 Hz - 200 Hz. Power Handling: 450W. Rated Impedance shall be 8 ohms. The system shall include an internal passive crossover network and shall include two Neutrik™ 4MP connectors.

The cabinet shall be molded from mid-density polyethylene. All cabinet dyes shall be non-heavy metal based. The cabinet shall meet Mil-Spec 810E and be ATA-III compliant. The cabinet shall have a 10 year warranty, and shall be solar rotationally molded.

The system shall include one 1.5" stand mount sockets. The system shall have eight 1/4-20 threaded inserts for hanging, four top four one side. The system shall have four 5/16-18 inserts on the rear of the cabinet. The loudspeaker shall have two 3/8-16 threaded inserts, one each side for yoke mounting. All drivers shall be protected by a three-layer chemically treated grill system. All hardware shall be stainless steel. The unit will include an optional gasketed lid and two folding handles.

The loudspeaker system shall be the Technomad Soho Tour.

Technomad
Audio. Anywhere.™

5 Tina Drive, South Deerfield, MA 01373
email: customercare@technomad.com
web: <http://www.technomad.com>
phone: 800.464.7757 fax: 617 424 8233
international: +1.617.275.8898